



DOOR FEATURES










	LACQUE DOOR	PVC MEMBRANE DOOR	MELAMINE DOOR	PANEL DOOR
WING MATERIAL	6-8 mm MDF	6-8 mm MDF	4 - 6 mm MDF Ready Melamine Surface	4mm MDF Ready Panel Surface
SURFACE	Raw MDF surface developed with paint techniques primed and painted.	Raw MDF surface is different 0.20 micron in colors With imported PVC material is coated	self-patterned and colored ready made melamine surface.	self-patterned paint the panel surface in the desired color is applied.
MODEL	with CNC pattern and modeling can be done.	with CNC pattern and modeling can be done.	Yüzey belli model ve desenlerde hazır olarak gelir.	Yüzey belli model ve desenlerde hazır olarak gelir.
MEASUREMENT	in desired dimensions	in desired dimensions	in certain dimensions 70CM - 91CM	in certain dimensions 70CM - 91CM
PULLEY FRAMEWORK	Wood Material	Wood Material	Wood Material	Wood Material
INNER FILLING	Wooden Grill or Kraft Paper Honeycomb	Wooden Grill or Kraft Paper Honeycomb	Wooden Grill or Kraft Paper Honeycomb	Kraft Paper Honeycomb
	Paintable PP* coated MDF Molding and Frame	0.20 Micron PVC coated MDF Molding and Frame	Foil covered MDF Molding and Safe	PP coated or direct paint applied MDF Frame and Frame
CASE AND SILL	Between two 12 mm MDF baked wood by putting PP coated obtained Sandwich Case	Between two 12 mm MDF baked wood by putting PP coated obtained Sandwich Case	Between two 12 mm MDF baked wood by putting PP coated obtained Sandwich Case	Between two 12 mm MDF baked wood by putting PP coated obtained Sandwich Case
	Paintable PP Coated Composite Material	0.20 Micron PVC Coated Composite Material	Foil Coated Composite Material	PP Coated Composite Material

^{*} PP, Paintable Paper, to make the paint more permanent and to make the wood longer lasting It is a protective material used. The surface is first covered with PP and then paint is applied.

LACQUER SERIES






















PVC SERIES

204

208







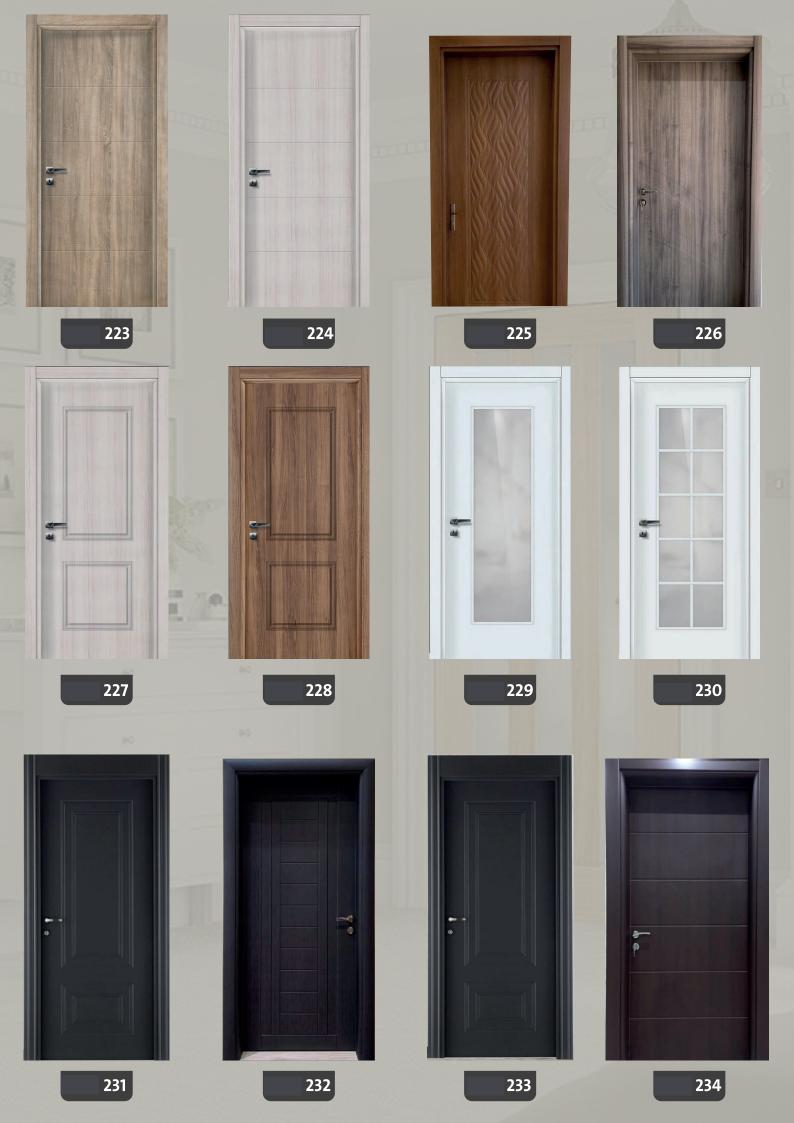





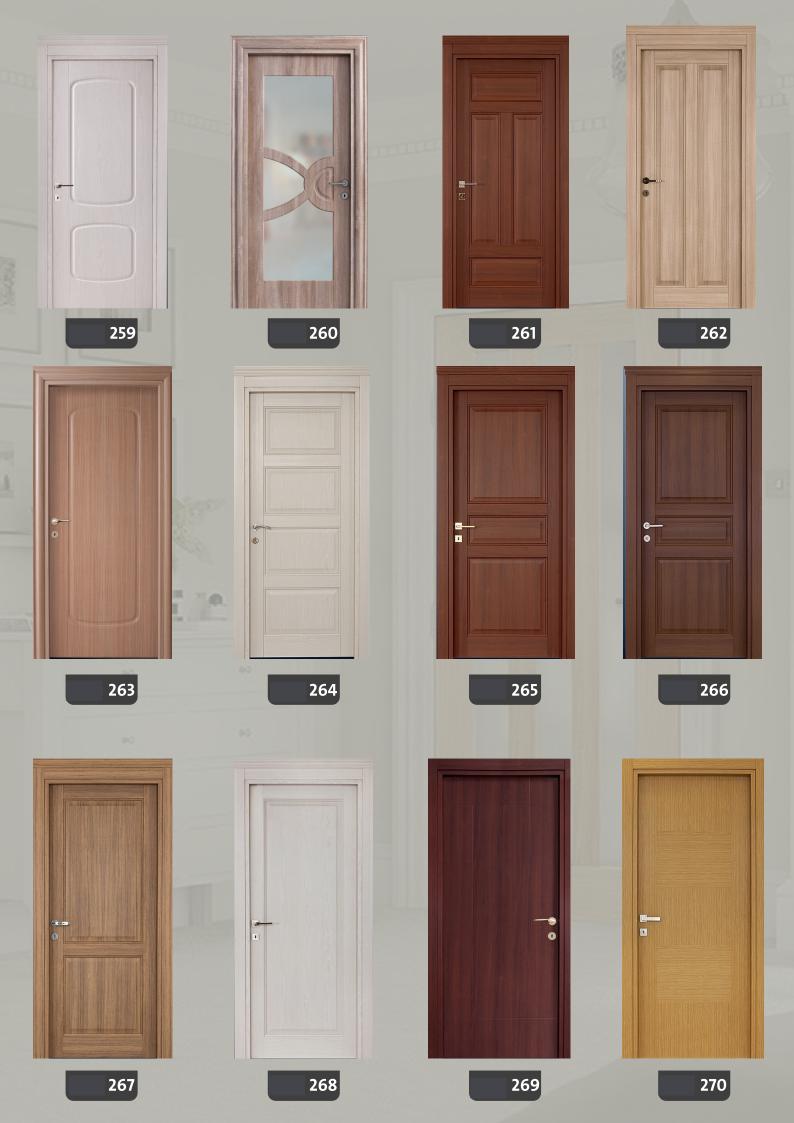

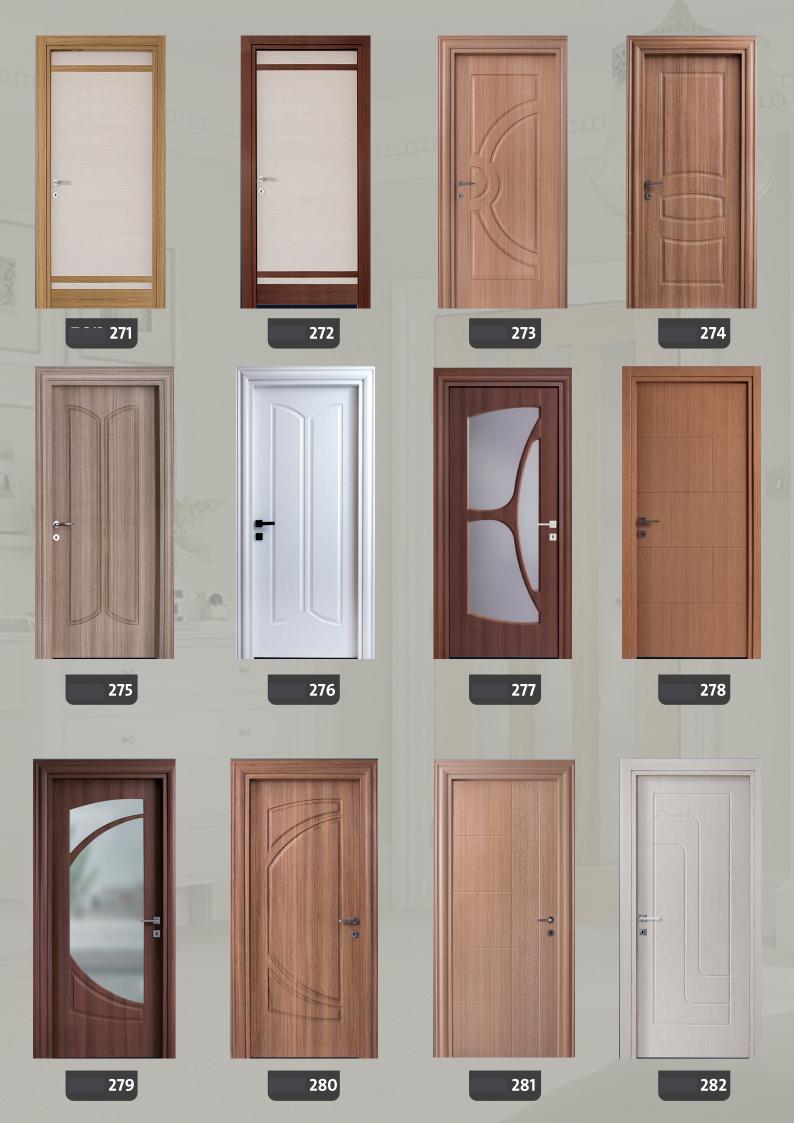



COLORS For PVC Doors

THE COLORFUL WORLD OF NZENGLOBAL

All that nature has to offer We also offer you the colors. imported from South Korea 0.20 micron water and moisture durable protective and long Our durable PVC colors to doors and models applicable

























































ABD Walnuts Bosse Consept

Coco

Ash White

Hopa Oak









MELAMINE **SERIES** •





Melamine and Panel Doors **PANEL SERIES** 400 401 402 • 403 404 405

COLORS

Melamine and Panel Doors

Colored foil on 4 mm MDF melamine coated ready surfaces door panels, pressed can be used immediately after. Extra No need for processes such as varnish, paint inaudible. Also in the application It provides cost and time advantage. Another economical and environmentally friendly product If the panel doors are 4 mm. MDF ready model and directly into patterned surfaces. is applied. According to demand and taste an aesthetic appearance by painting gets it

































Caspian Panel







Melamine
and Panel
from surfaces
another more
more colors and
for model
with us
contact
You can pass.


Perge Panel


Hittite Panel

Sumela Panel

Myra Panel

PULLEY FEATURES





		WOOD GRILL HOLDER	KRAFT HONEYCOMB FILLED HOLE	
FRAME INNER MATERIAL		without bending prepared 28-30-32mm x 45mm attached from baked fir, spruce, pine trees or optionally imported A pulley frame is made from serens.	without bending prepared 28-30-32mm x 45mm attached from baked fir, spruce, pine trees or optionally imported A pulley frame is made from serens.	
		term as nucleation inside dried pine or optional from fir wood density grid.	Kraft or testliner type with a special technique honeycomb in shape, obtained by combining with this filling material that looks like the rim is filled.	
DΙΛ	desired width and length Suitable for the project special productions pulley dimensions can be ap		28-30-32 mm Thickness + desired width and length. Suitable for the project in special productions pulley dimensions can be applied.	

The spars used to prevent the pulleys from bending are knotless, pine gum. It is produced by carefully selected first class material. prepared surface and band application on pulleys first class imported from Germany done with glue.

All kraft paper honeycombs used are in accordance with TSE and ISO standards. it also has all the necessary quality certificates

FRAME - SIDE FEATURES

			Surfaces are wood inside MDF a material of type of safe.	
		MDF CASE	SANDWICH CASE	COMPOSITE CASE
THICKNESS	ESS	36 - 42 mm	36-42 mm	36 mm
WID	ТН	10 - 40 cm	10 - 40 cm	10 - 40 cm
LENG	TH	desired in length	desired in length	desired in length
SURFACE APPLICATIO	ON	Paint (PP* Wrapped) + PVC Coating	Paint (PP* Wrapped) + PVC Coating	Paint (PP* Wrapped) + PVC Coating

^{*} PP, Paintable Paper, to make the paint more permanent and to make the wood longer lasting It is a protective material used. The surface is first covered with PP and then paint is applied.

	MDF STRING	COMPOSITE MILL	
WIDTH	8 - 27 cm	4 - 10 cm	
LENGTH	desired in length	desired in length	
SURFACE Paint (PP* Wrapped) + PVC Coating		Paint (PP* Wrapped) + PVC Coating	

